

RoboCup Rescue 2018 Team Description Paper

NuBot

Ruoyi Yan, Hui Zhang, Huimin Lu, Junhao Xiao, Xieyuanli Chen, Yi Li, Qihang Qiu, Shanshan Zhu,
and Chenghao Shi

Info

Team Name: NuBot
 Team Institution: National University of Defense Tech.
 Team Leader: Xieyuanli Chen
 Team URL: <http://nubot.trustie.net/>

RoboCup Rescue 2018 TDP collection:
https://robocup-rescue.github.io/team_description_papers/

Abstract—Supported by the Rescue Robot project held by National University of Defense Technology, our team has designed the NuBot rescue robot from mechanical structure to the electronic architecture and software system. Benefiting from the strong mechanical structure, our rescue robot has good mobility and is quite durable, so it will not be trapped even facing the highly cluttered and unstructured terrains in urban search and rescue. The electronic architecture is built on the industrial standards which can bear electromagnetic interference and physical impact from the intensive tasks. The software system is developed upon the Robot Operating System (ROS). Based on self-developed programs and several basic open source packages provided in the ROS, we developed a complete software system including localization, mapping, exploration, object recognition, etc. Our robot system has been successfully applied and tested in the RoboCup Rescue Robot League (RRL) competitions, where our rescue robot team entered the top 5 and won the Best in Class small robot mobility in 2016 RoboCup RRL Leipzig Germany. We updated the mechanical structure of the robot and adapted to the rescue environment in 2017. This year our robot has been increased semi-autonomous functions and got the champions of 2017 RoboCup China Open RRL competitions.

Index Terms—RoboCup Rescue, Team Description Paper, Autonomous Navigation, Rescue Robot, SLAM.

I. INTRODUCTION

At present, there are many research institutions doing research focusing on urban search and rescue (USAR), using different kinds of outdoor mobile robot including wheeled, legged, tracks and so on. Among them, tracked robots has stronger motion ability and higher adaptability to the outdoor disaster environments, and has been widely used in various type design of rescue exploration robot. But the traditional double-tracked construction in the face of obstacles with large size environments, it is apparently lack of better climbing ability. It is prone to stuck, overturning and so on when in more dramatic change terrain.

In this paper, with the specific requirements of rescue robot platform in the complex environments, it is designed of a

three-section six-tracks robot platform, based on the original power track, focusing on improving the climbing ability of front and rear fins, to make the robot platform more adaptive in the face of more dangerous terrain with oversize obstacles. Figure 1 shows the overview of our NuBot rescue robot.

This system coordinate with laser scanner, inertial measurement unit, microphone, USB-cameras and other extensions accessories. By sending back the real-time image information through camera, it can achieve remote control and keep a stable moving in complex disaster environments. Based on these, our robot can achieve the tasks of creating the lenvironment map, realizing real-time robot-human interaction, finding the simulated victims and many other tasks.

At the same time, as the increasing numbers of robot tasks, higher requirements for real-time and stability of the electrical system platform has been put forward. In order to facilitate the robot platform with continued expansion sensors, actuators, and to ensure real-time communication during the controlling process, the robot platform was introduced PC-based control technology and EtherCAT fieldbus based technology in the electrical level. The platform can ensure the system real-time and stability in a highly complex environment. Based on our rescue robot, we have conducted some research [1], [2], [3], [4].

II. SYSTEM DESCRIPTION

Many impressive results about the design of the robot system for USAR missions have been achieved, and various robots have been developed for USAR tasks. In early years, rescue robots were usually teleoperated by human operators. With robotic technology advances significantly, the robots autonomy level has been improved greatly. In order to adapt to the actual rescue environment, we also designed our rescue robot system to realize teleoperated operation, semi-autonomous and fully autonomous operation [3].

A. Hardware

Our robot uses a tracked platform, as shown in Fig. 1. The tracked robot with front and back sub-tracks (flippers) provides effective mobility, and it is the mostly common platform used in the RoboCup RRL competitions and also in the real rescue missions.

In order to complete the USAR missions, the mobile robot must be equipped with an onboard computer and various sensors for mapping, navigation and victim detection.

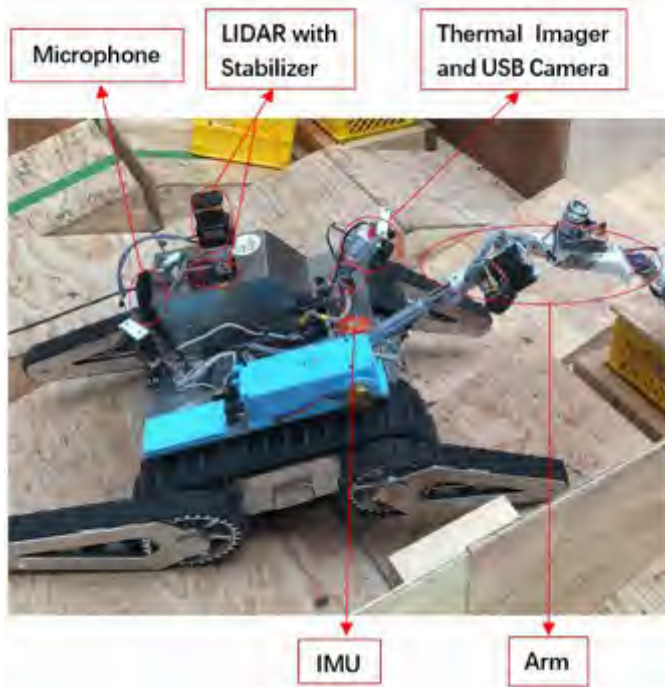


Fig. 1. The Overview of our rescue robot.

The robot uses a state-of-the-art industrial grade computer from Beckoff. The computer (Intel Core i7) provides enough processing ability to deal with huge data and the robustness when traversing challenging terrains.

The robot is equipped with a Hokuyo UTM-30LX Light Detection And Ranging (LiDAR). The LiDAR is suitable for mobile robots because of its low power consumption and compact size. The field of view of the scanner is 270° , the scanning distance is 30m and the scanning frequency is 40Hz. Hokuyo UTM-30LX can be used for distance measurement, and the quality of the acquired data is almost the same on different surfaces, colors and even under different illumination.

In order to measure the robots pose when exploring in the unstructured and uneven terrains, a 6DOF inertial sensor, Xsens MTI-100 has been integrated. MTI-100 is a miniature Inertial Measurement Unit (IMU) that outputs yaw angle with no drift, and provides a calibrated three-axis acceleration, angular velocity and magnetic field strength.

Visual perception is the most important source for victim detection. Therefore a pan-tilt-zoom camera is mounted on the tracked platform. Besides, a low-cost USB video camera and a Thermal Image Optris PI640 has been employed. The visual sensors are fused to detect and localize victims.

In addition, the robot is equipped with a multiple-degree-of-freedom arm. In the rescue environment, the arm can open the door, open or close the valve and deliver goods to victims or other operations.

B. ROS-based Software

Robot Operation System (ROS) is used to build the software of our rescue robot. It is the most popular robotic framework nowadays. It provides open source tools, libraries, and

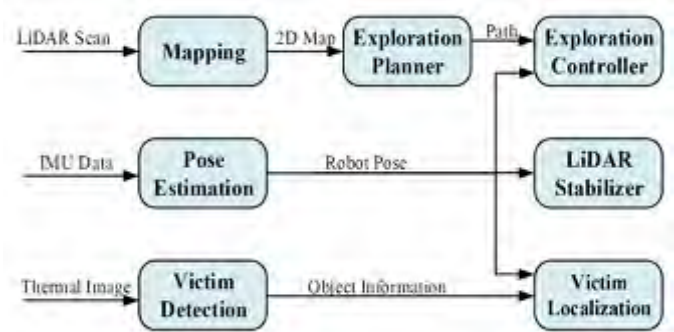


Fig. 2. The software architecture based on ROS. ROS nodes are represented by rectangles, topics by arrow-headed and services by diamond-headed lines. Services are originated at the service caller.

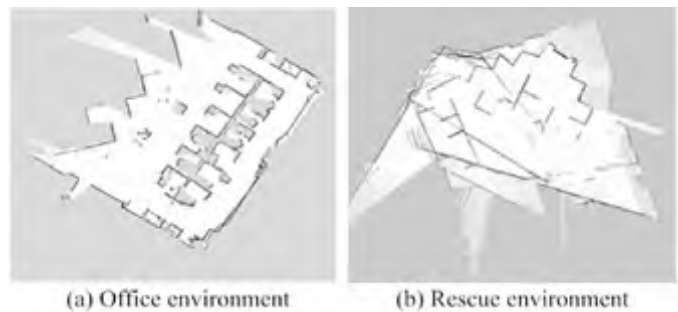


Fig. 3. The SLAM results of HectorSLAM in the office environment with even terrains and the rescue environment with uneven terrains.

drivers for robotics researches and applications. ROS enables researchers to quickly and easily conduct experiments. The software architecture of our rescue robot is shown in Fig. 2.

III. 2D SLAM WITH ACTIVE LIDAR STABILIZER

A. 2D SLAM

The ability to build a map of the unknown environment and localize itself, named as SLAM, is one of the most important abilities for robots to operate fully autonomously in USAR scenarios. Most existing 2D SLAM algorithms are based on probabilistic representations. The advantage is the robustness to measurement noises and the capability to formally represent uncertainty in the measurement and estimation process. Furthermore, most probabilistic SLAM algorithms are built upon the Bayes rule.

HectorSLAM [5] and Gmapping [6] are two typical Bayes based methods, and their open source implementations are available as ROS packages. HectorSLAM is a 2D SLAM system based on robust scan matching, while Gmapping use both odometry and scan matching. However, in the rescue environment, the odometry is unreliable, which makes Gmapping inapplicable. So we choose HectorSLAM as the basal SLAM system. HectorSLAM can perform well in a flat office environment (Fig. 3-(a)), but there are many limitations if we use the HectorSLAM directly in the rescue environment (Fig. 3-(b)). we will introduce how to deal with this problem in the next subsection.

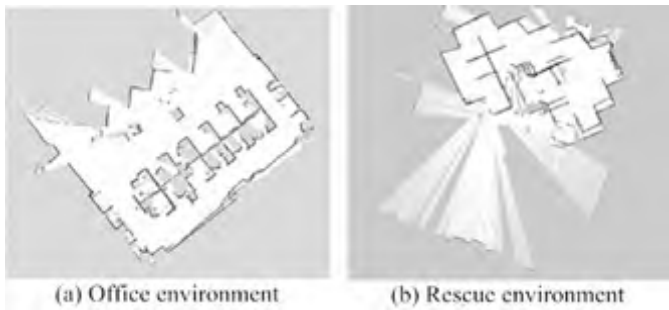


Fig. 4. The SLAM results of HectorSLAM with LiDAR Stabilizer in the office environment with even terrains and the rescue environment with uneven terrains.

B. Active LiDAR Adjustment

Robots for USAR are usually used in unstructured environments with uneven terrains. Therefore the sensor data might be spurious if the sensors are rigidly coupled to the robot. The challenge of uneven terrains has been added into the RoboCup rescue competition by using 10 and 15 pitch/roll ramps.

One way to overcome these problems is to use a 3D LiDAR instead of a 2D LiDAR. The registration of the 3D scans would build a exact global map, and the pose of the robot can also be calculated. However, it spends much more time to do the 3D scan registration with the global map than the scanning and matching in 2D.

As a compromise, we have designed a cheap stabilizer with two servos to adjust the orientation of the 2D LiDAR, based on the readings from the MTI sensor. As a result, the 2D LiDAR can be kept on the horizontal plane even when the robot is traversing on uneven terrains. The rotation/tilt stabilizer unit mounted on the robot is shown in Fig. 1. The result of HectorSLAM with LiDAR Stabilizer is shown in Fig. 4.

IV. AUTONOMOUS EXPLORATION

A fully autonomous USAR robot must explore the rescue environment and search victims autonomously. This problem can be separated into three questions:

- Selecting a target point: Where should the robot go next?
- Planning a path: Which way should the robot take to go to the target?
- Computing the control command: What action should the robot do?

A. Frontier-based Exploration

The primary problem of autonomous exploration is: based on existing knowledge about the real world, where should the robot move to efficiently acquire new information?

Most approach use the occupancy grid. When a grid map has been built, all the grid can be divided into three categories: Free, Unknown and Occupied. The primary idea is as follows: in order to get new information, going to a frontier which separates known regions from unknown regions. The frontier here is a cell in the occupancy grid which is marked as free but has a neighboring unknown cell. A segment of adjacent frontiers is considered as a potential target if it is large enough

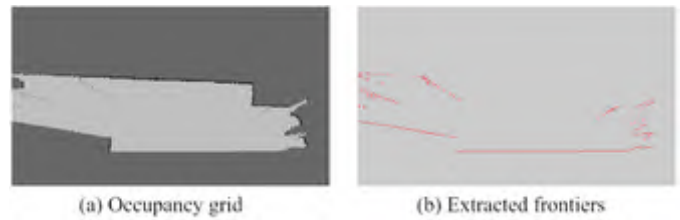


Fig. 5. Occupancy grid and extracted frontier. (a) Black area is Occupied, white area is Free and gray area is Unknown;. (b) Red point are detected as frontiers.

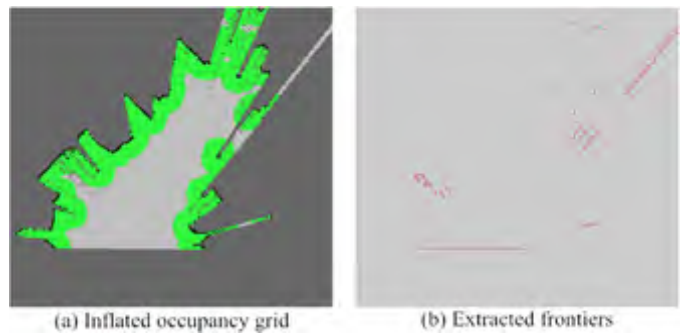


Fig. 6. Occupancy grid with inflated obstacles and the extracted frontier. In (a), green areas are the inflated obstacles.

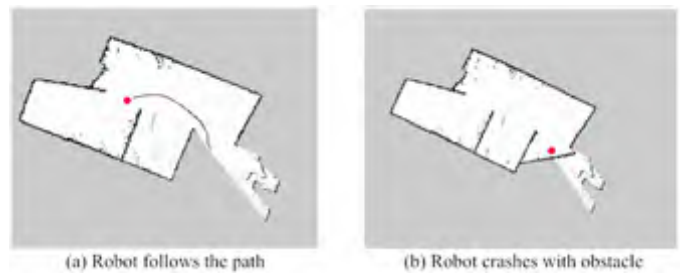


Fig. 7. A example of the robot being stuck.

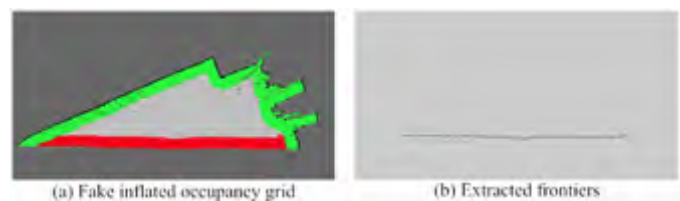


Fig. 8. Occupancy grid with fake inflated obstacles and the extracted frontier.

for the robot getting though. If more than one potential target are detected, the closest one is selected. Figure 5. shows the result of extracted frontiers.

A disadvantage of directly extracting frontier from the original map is that the extracted frontier may be close to obstacles. To overcome this problem, the Inflated Obstacle method has been utilized. This method will transform the cells within a certain distance to obstacles as Occupied, thus the frontiers will not be extracted in these areas. Figure 6. shows the result of extracted frontiers in the occupancy grid with inflated obstacles.

Unknown areas could be occupied or free areas, which have

not been known by robots. In the narrow rescue environment, the probability of the unknown areas being obstacles is quite high. Furthermore, the computational complexity of path planning will increase as the scale of the built map, so the frequency of path planning will not be high for autonomous USAR robots. If the robot takes one frontier as the target point, and the frequency of path planning is low, or the robots moving distance to the target is small, the robot may crash with unknown obstacles.

Figure 7. shows such a example where the robot may be stuck. The red point represents the robots position, and the black curve represents the planned path. In this situation, because of the low frequency of path planning, the robot will not re-plan the path before arriving the target point, so the robot may crash with obstacles. The worst result is that the robot can not move any more.

To deal with this problem, we proposed a method named as Fake Inflated Obstacle, where those extracted frontiers located between free areas and unknown areas are considered as obstacles, then these obstacles are inflated, and finally new frontiers can be searched between these inflated areas and free areas. Using this method, the distances between the target point and the actual obstacles are enough for our robots safe movement. The extracted frontiers from fake inflated obstacles are shown in Fig. 8.

B. Path Planning and Controller

When a target has been selected by the frontier-based method, the problem turns into optimal path planning. Following Jarvis and Byrne [7], we proposed the distance transform to find the closest way from an arbitrary starting point to a fixed target. The distance transform of an occupancy grid calculates the cost to reach the target cell for each free cell. The cost between two cells (without obstacles between them) can be the chessboard distance, city block distance, or the Euclidian distance. After the distance transform has been applied for each cell of the grid, the shortest path from any cell to the target cell can be searched simply by following the steepest gradient.

Based on the SLAM and exploration planning algorithms mentioned above, the robot can build the 2D grid map and plan a path to the next frontier. Ideally, the robot can explore the environment autonomously after integrating a simple controller to compute the commands to drive itself. However, different from virtual simulation environment or ideally indoor scenarios, real disaster sites are filled with unstructured terrains. Coupled with the inaccuracy of tracked vehicles, it is quite challenging to realize accurate control of the robot to follow the exploration path. A simple controller, which directly produces the velocity command by calculating the biases of current position and orientation of the robot with the target, can not perform well in real world experiments. Therefore, we propose a novel controller combining the exploration planer and multi-sensor information to overcome the influence of challenging terrains. The inputs of the controller are LiDAR data, IMU data, the current position and orientation of the robot and the target.

The experimental results show that using this kind of multi-sensor based controller, the exploration efficiency and robustness can be improved, and the robot can explore the full rescue environment of the RoboCup China Open RRL competition, as shown in the video posted on our website.

V. SEMI-AUTONOMOUS EXPLORATION

In order to adapt the actual rescue environment and make the operator easy to accomplish the USAR missions, we have added some semi-autonomous functions to the robot.

MoveIt integrates some modules for arm motion planning with collision detection. These modules exist in the form of plugins, which make MoveIt easier to expand and can communicate with different libraries at the same time. Based on MoveIt, we set up a semi-autonomous fuction, by which we only need to set the target position of the robot's hand and it can autonomously generate a trajectory of the robot's arm while avoiding obstacles. Once we confirm the trajectory and request an action, the robot's arm can autonomously track the planned trajectory.

Secondly, we have realized the way-point navigation. We collect way points during the run phase, and use these way points to realize semi-autonomous navigation when the operation way of the robot is switched to semi-autonomous.

VI. VICTIM DETECTION AND LOCALIZATION

Reliable detection of human victims in unstructured postdisaster environments is a key issue for USAR robots, which is challenging in the rescue environment with low illumination, dust and smoke when using normal visible light camera. Therefore we use a thermal camera (Oprtris P640) to recognize the simulated victims autonomously using a blob detection algorithm. After segmenting the thermal image with a threshold like 36°C , the connected warm regions can be regarded as victims.

After detecting the victim successfully, the position of the victim should be estimated on the built map. The image coordinate of the victim can be used to evaluate the victims direction in the camera coordinate system. Because the victim should be located on the obstacles, using the victims direction and the cameras orientation, the victims position can be estimated by searching the nearest obstacle on the built map along the victims direction.

VII. APPLICATION RESULTS

The RoboCup RRL competition provides a systematic benchmark for testing and evaluating teleoperated and autonomous USAR robots in a simulated post-disaster environment. We present the results achieved when participating the RoboCup China Open 2017. In this competition we won the championship including exploring the rescue environment autonomously.

Figure 9. shows the map of explored arena and the marking of the found victims and recognized QR-codes on the map (Fig. 10). It should be noted that the robot successfully found 5 victims autonomously and the total number of victims was 8 in the final competition. The number of the recognized

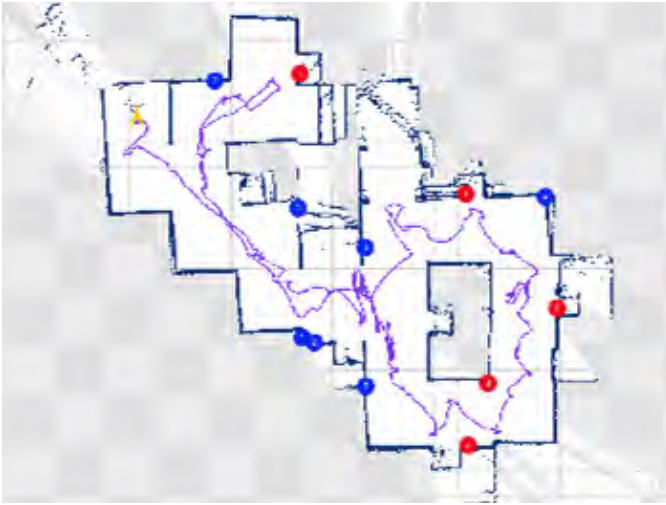


Fig. 9. The autonomous exploration results of our rescue robot participating the 2017 RoboCup China Open RRL. The starting pose of the robot is marked by yellow arrows, the detected victims marked by red dot, and the recognized QR-codes marked by blue dot. In the final competition the robot discovered 5 victims correctly and autonomously.

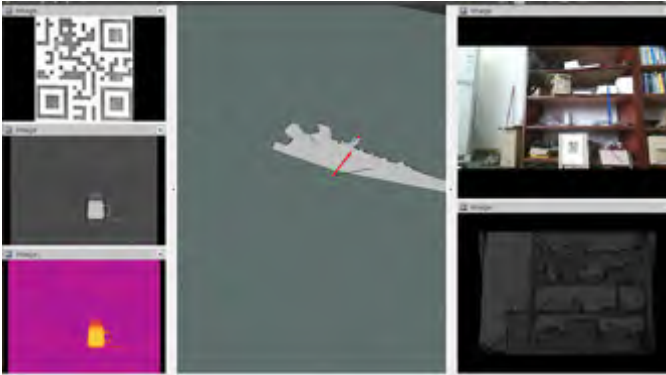


Fig. 10. The result of victim detection and localization, where the found victim is marked by red dot in the map.

QRcodes correlates with the fraction of the arena that was explored by the robot during the competition. Videos of the final competition and experiments are available on our website.

VIII. CONCLUSION

Our rescue robot can achieve good performances in both telecontrolled and autonomous modes. Currently, we are going to participate in the 2018 RoboCup ChinaOpen, which will be held from 11st April to 15th April in Shaoxing, Zhejiang province. RoboCup ChinaOpen will provide a chance for us to prepare and improve our robot system for participating the RoboCup 2018 in Montreal, Canada. We hope we can perform well and learn a lot in the RoboCup 2018 in Montreal, Canada.

APPENDIX A

TEAM MEMBERS AND THEIR CONTRIBUTIONS

Currently, there are three advisors and five team members in the NuBot. The advisors are Hui Zhang, Huimin Lu, Junhao Xiao. The team members are as follows:

- Xieyuanli Chen Software System,SLAM algorithm.

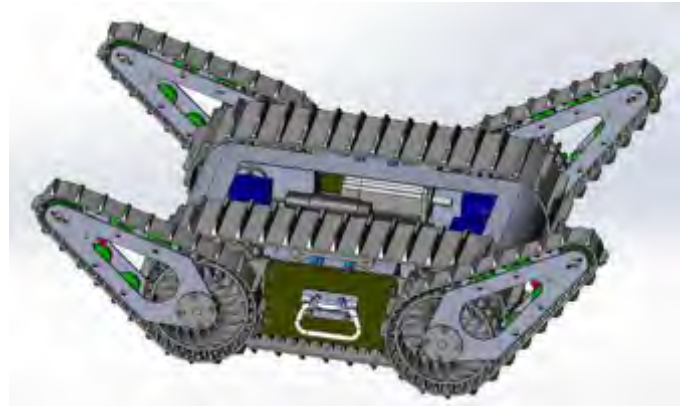


Fig. 11. The overview of the mechanical structure.

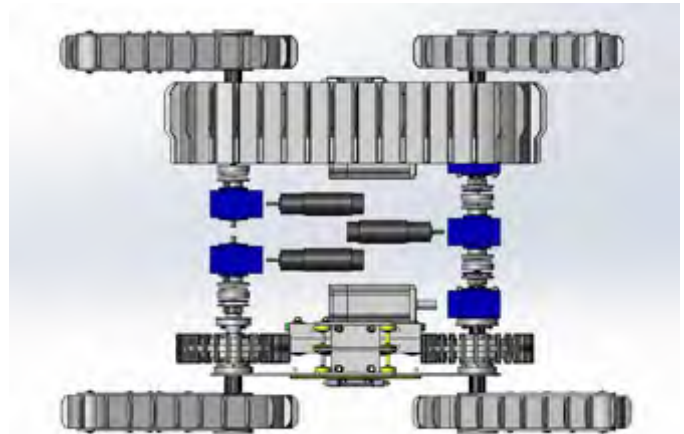


Fig. 12. The topview of the mechanical structure.

- Yi Li Mechanical Design.
- Ruoyi Yan Software System.
- Qihang Qiu SLAM algorithm.
- Shanshan Zhu Software System.
- Chenghao Shi Mechanical Design, Controller.

APPENDIX B CAD DRAWINGS

The mechanical structure of the robot platform is shown in Fig 11. and Fig. 12.

APPENDIX C LISTS

A. Systems List

We list the Manipulation System in Table I. and the Software System in Table II.

ACKNOWLEDGMENT

The authors would like to thank the senior team members Yi Liu, Yuhua Zhong and Pan Wang for their great contributions to the NuBot rescue team. They have obtained their Master degrees and left the team. Our team is also supported by projects of National Science Foundation of China (No. 61403409 and No. 61503401).

TABLE I
MANIPULATION SYSTEM

Attribute	Value
Name	NuBot
Locomotion	tracked
System Weight	38.41kg
Typical operation size	0.6 x 0.6 x 0.6 m
Unpack and assembly time	60 min
Startup time (off to full operation)	5 min
Power consumption (idle/ typical/ max)	60 / 200 / 800 W
Battery endurance (idle/ normal/ heavy load)	120 / 60 / 30 min
Maximum speed (flat/ outdoor/ rubble pile)	2 / 1 / - m/s
Payload (typical, maximum)	50/ 100 kg
Arm: maximum operation height	170 cm
Arm: payload at full extend	1kg
Support: set of bat. chargers total weight	2.8kg
Support: set of bat. chargers power	220W (12-24V AC)
Support: Charge time batteries (80%/ 100%)	30 / 60 min

TABLE II
SOFTWARE LIST

Name	Version	License	Usage
Ubuntu	16.04	open	
ROS	kinetic	BSD	
OpenCV-ORB [8]	2.4.8	BSD	Haar: Victim detection
Hector SLAM [5]	0.3.4	BSD	2D SLAM
NuBot Exploration [3]	1.0	closed source	Autonomous Exploration

REFERENCES

- [1] X. Chen, H. Zhang, H. Lu, J. Xiao, Q. Qiu, and Y. Li, "Robust slam system based on monocular vision and lidar for robotic urban search and rescue," in *2017 IEEE International Symposium on Safety, Security and Rescue Robotics (SSRR)*, Oct 2017, pp. 41–47.
- [2] X. Chen, H. Lu, J. Xiao, H. Zhang, and P. Wang, "Robust relocalization based on active loop closure for real-time monocular slam," in *International Conference on Computer Vision Systems*. Springer, 2017, pp. 131–143.
- [3] Y. Liu, Y. Zhong, X. Chen, P. Wang, H. Lu, J. Xiao, and H. Zhang, "The design of a fully autonomous robot system for urban search and rescue," in *IEEE International Conference on Information and Automation*, 2016.
- [4] P. Wang, J. Xiao, H. Lu, H. Zhang, R. Yan, and S. Hong, "A novel human-robot interaction system based on 3d mapping and virtual reality," in *Chinese Automation Congress*, 2017, pp. 5888–5894.
- [5] S. Kohlbrecher, J. Meyer, O. von Stryk, and U. Klingauf, "A flexible and scalable slam system with full 3d motion estimation," in *Proc. IEEE International Symposium on Safety, Security and Rescue Robotics (SSRR)*. IEEE, November 2011.
- [6] G. Grisetti, C. Stachniss, and W. Burgard, "Improved techniques for grid mapping with rao-blackwellized particle filters," *Robotics IEEE Transactions on*, vol. 23, no. 1, pp. 34–46, 2007.
- [7] R. Jarvis and J. Byrne, "Robot navigation: Touching, seeing and knowing," in *Proceedings of the 1st Australian Conference on Artificial Intelligence*, vol. 69, 1986.
- [8] R. Lienhart and J. Maydt, "An extended set of haar-like features for rapid object detection," in *Image Processing. 2002. Proceedings. 2002 International Conference on*, vol. 1, 2002, pp. I–900–I–903 vol.1.